

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number
WO 2005/065884 A2

(51) International Patent Classification⁷: **B23Q**
(21) International Application Number:
PCT/GB2005/000023
(22) International Filing Date: 6 January 2005 (06.01.2005)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
0400144.2 6 January 2004 (06.01.2004) GB
(71) Applicant (for all designated States except US): **RENI-
SHAW PLC** [GB/GB]; New Mills, Wotton-under-Edge,
Gloucestershire GL112 8JR (GB).

Andrew, James [GB/GB]; 24 Over Lane, Almondsbury,
Bristol, South Gloucestershire BS32 4BP (GB).


(74) Agents: **JACKSON, John, Timothy et al.**; Renishaw
plc, Patent Department, New Mills, Wotton-under-Edge,
Gloucestershire GL12 8JR (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: MACHINE TOOL WORKPIECE INSPECTION SYSTEM

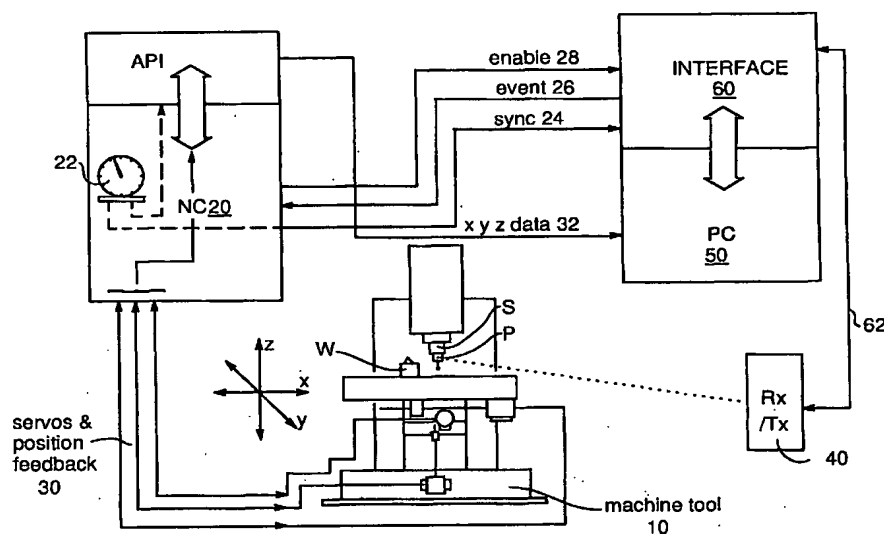

(57) Abstract: A workpiece inspection system is disclosed for determining measurements of a workpiece on a machine tool. The system utilises a measurement device which outputs data relating to the workpiece (e.g. in place of a conventional cutter). The problem of obtaining real time data relating to the position of the machine tool is overcome by recording a machine tool position data set and a measurement device data set at selected instants which are defined by a synchronisation signal. The data sets are combined later in the correct relative position because the synchronisation signal was used. The synchronisation signal can issue from the machine tool controller, an interface, measurement device or another part of the system.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *without international search report and to be republished upon receipt of that report*